



NEW CONSTRUCTION

DO NOT BEGIN TAPERING CONCRETE UNTIL IN PLANE WITH OUTER FACE OF POWERLIFT SWINGING DOOR LEAF. BOTTOM DOOR SEAL WILL NOT FUNCTION PROPERLY IF TAPER STARTS FURTHER INTO BUILDING.

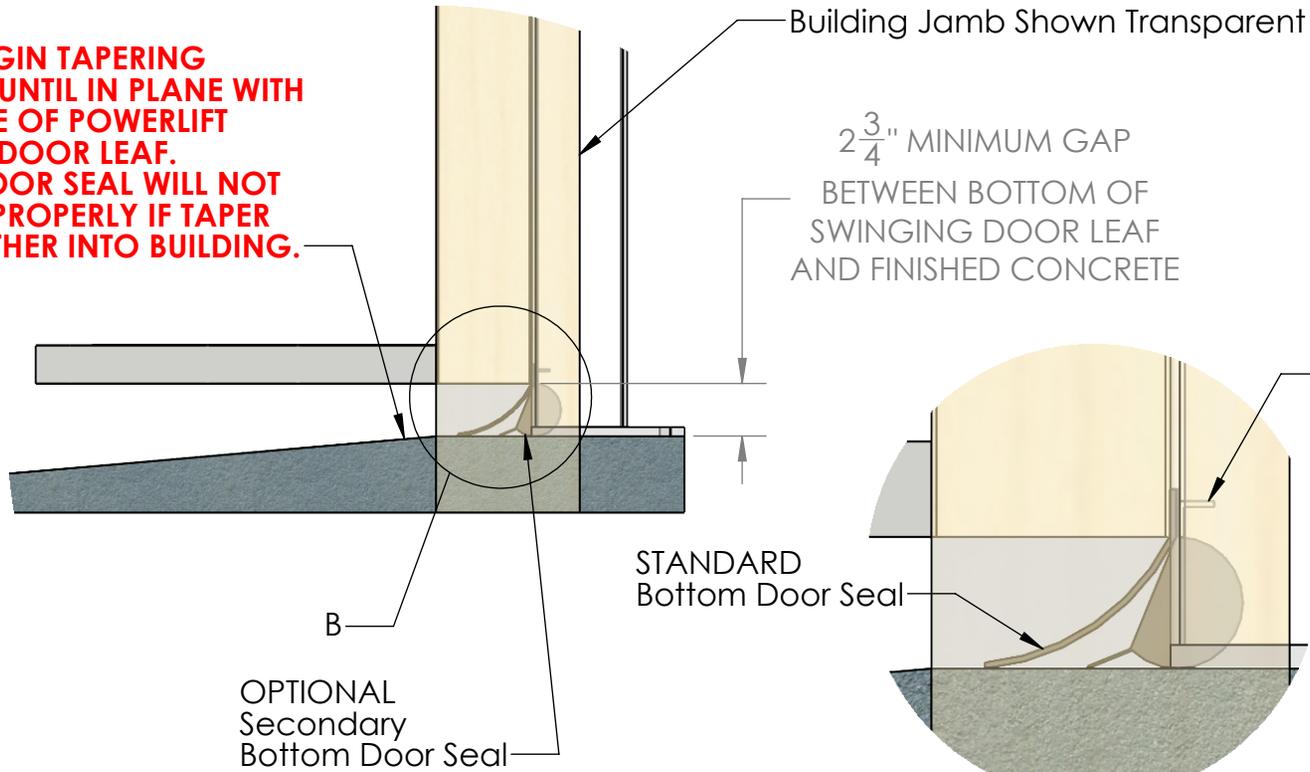

2 ³/₄" MINIMUM GAP BETWEEN BOTTOM OF SWINGING DOOR LEAF AND FINISHED CONCRETE

Do Not Sheet Over the Angle Iron that Holds Bottom Seal(s) onto Door in Case Seal Needs to be Replaced in the Future

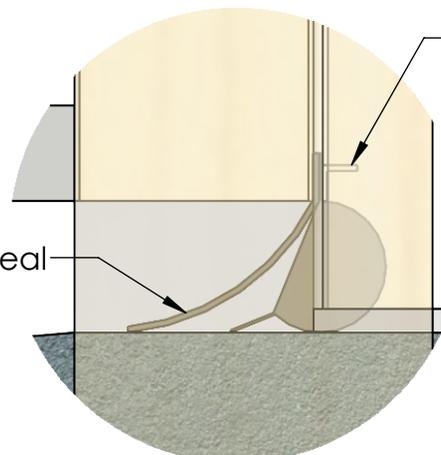

DETAIL B
SCALE 1 : 4

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POWERLIFT DOORS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POWERLIFT DOORS IS PROHIBITED.



		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	Part Number
		DIMENSIONS ARE IN INCHES		DRAWN		TITLE: PowerLift Concrete Apron Detail
		TOLERANCES:		CHECKED		
		FRACTIONAL ±		ENG APPR.		
		ANGULAR: MACH ± BEND ±		MFG APPR.		
		TWO PLACE DECIMAL ±		Q.A.		
		THREE PLACE DECIMAL ±		COMMENTS:		
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14. 5-2009				SIZE Door Type(s) REV A
		MATERIAL				SCALE: 1:128 WEIGHT: SHEET 1 OF 1
	NEXT ASSY	USED ON	FINISH			
	APPLICATION		DO NOT SCALE DRAWING			